



DCM dispersion compensation device

OP-DCM100SU



Shenzhen Optostar Optoelectronics Co., Ltd

2016. 5 (Version 3)

1. Summary

OPTOSTAR optical compensation function with slope dispersion compensation for standard single-mode fiber can DCM (G.652) were dispersion and dispersion slope compensation broad band in the C-band, allowing the system to optimize residual dispersion. In the dispersion compensation value of 1545nm wavelength dispersion can reach -2070ps / nm.

The DCMs offer a high dispersion compensation level and a very low insertion loss penalty. They provide negative dispersion compensation over the full C-Band with possible distance extensions of up to 120 kilometers.

2.Features

- DWDM system dispersion compensation and broadband low residual dispersion
- G.652 fiber C-band 100% slope compensation (standard value)
- Low insertion loss
- Low polarization mode dispersion
- Performance indicators by
- Telcordia GR-2854-CORE standard certification
- Reliability by Telcordia GR-1221-CORE standard certification

3.Dispersion compensation and dispersion slope compensation

Obtained at a specific wavelength dispersion compensation, should satisfy the following relationship:

$$DTF \times LTF + DDCF \times LDCF = 0$$

DTF: transmission fiber dispersion;

LTF: length of the transmission fiber;

DDCF: dispersion of the dispersion compensating optical fiber;

LDCF: dispersion compensation fiber length;

Dispersion slope compensation in the band, should satisfy the following relationship:

$$STF \times LTF + SDCF \times LDCF = 0$$

STF: dispersion of the transmission fiber;

SDCF: dispersion of the dispersion compensating optical fiber

According to the above two relationships obtained dispersion compensation and dispersion slope

compensation, should satisfy the following relation:

$$RDSDCF = SDCF / DDCF = STF / DTF$$


Assuming standard single mode fiber at 1545nm wavelength dispersion of 16.7ps / nm / km, a

dispersion slope of 0.060 ps / nm² / km, RDS about 0.0036nm⁻¹

4. Nonlinear characteristics

Parameters	MIN	MAX
Brillouin scattering threshold (dBm)	6	-
Non-linear coefficient (n ² /A _{eff}) (W ⁻¹)	-	1.4*10 ⁻⁹
Effective area (A _{eff})@1550nm (um ²)	20	-
Maximum input power (dBm)		23
Operating temperature range	-5℃	70℃
Storage temperature range	-40℃	85℃
Relative humidity	<85%	
Environmental / reliability testing	Comply with Telcordia GR-2854 and GR-1221 standard	
Size	482.6(W)x350(D)x43.6(H)(mm)	

5.Application Example

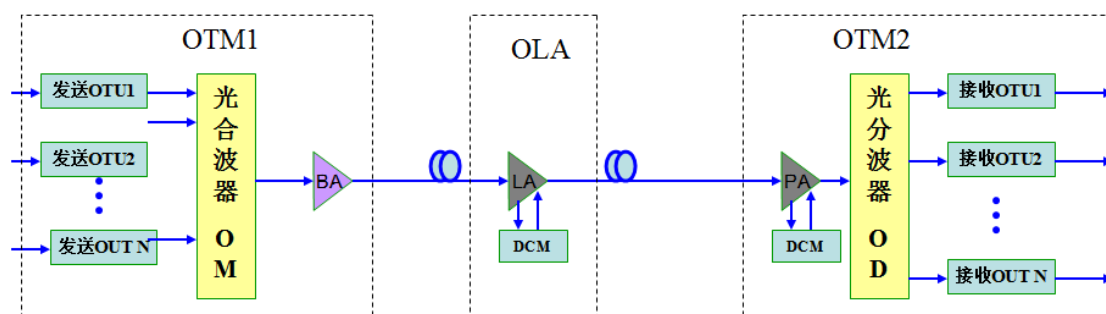

6.Ordering Info

Parameters	DCM20	DCM40	DCM60	DCM80	DCM100	DCM120
Compensated Distance (km)	20	40	60	80	100	120
1545nm dispersion (ps/nm)	-340+/-10	-670+/-20	-1000+/-30	-1340+/-40	-1680+/-50	-2010+/-60
1545nm relative dispersion slope (nm ⁻¹)	0.0036 +/- 10%					
Insertion Loss (dB)	≤3.3	≤4.7	≤6.4	≤8.0	≤9.5	≤11.0
Insertion Loss (typ) (dB)	2.7	4.0	5.4	6.7	8.0	9.3
Polarization mode dispersion (ps)	≤0.6	≤0.7	≤0.8	≤0.9	≤1.0	≤1.1
Polarization mode dispersion (typ) (ps)	0.2	0.3	0.4	0.5	0.6	0.7
Polarization dependent loss (dB)	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1



Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address: A-14, Haide Building, the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen, China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype: ouyangroya

Web: www.optostar.com.cn