



26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports and 2 Gigabit Fiber Ports

OP-S24E2X



Shenzhen Optostar Optoelectronics Co., Ltd

2013. 08 (Version 2)

Overview

The 26-Port gigabit PoE ports provide fast connection to servers or the backplane of the gigabit speed. It features with PoE (Power Over Ethernet) function through different power levels of PoE power supply, that is it can supply the 48V DC power to the PD remote devices (e.g. IP Phone, WLAN AP, Security, Bluetooth AP etc.) via a network cable, in order that realizing the power supply for remote PD devices. As the power supply PSE (Power Sourcing Equipment) side device, which supports the standard IEEE802.3af power standard and single-port power is 15.4W.

This cost-effective POE33024PF is perfectly suitable for security surveillance/ small business/ home use. It comes with excellent lightning-proof capabilities and security features. The product adopts the standard rack metal housing design and is easy to install. POE33024P is fully compliant with IEEE802.3af/ IEEE802.3 10BASE-T Ethernet/ IEEE802.3u 100BASE-TX fast Ethernet/ IEEE 802.3ab 1000BASE-T Ethernet ANSI/IEEE802.3NWay auto-negotiation and IEEE802.3x flow control. This POE33024P comes with the PoE green power saving application mode.

Product Features


- Supply power to 5 classes Ethernet wireless access point (AP) and network surveillance cameras (PoE)
- Port1 to Port24 compatible with IEEE802.3af standard power Supply (Maximum power of each port is 15.4W)
- 24x 10/100 /1000Mbps automatic adjustment RJ45 PoE ports, 2x 10/100 /1000Mbps SFP fiber uplink ports
- Meets the standards of the IEEE 802.3af/IEEE 802.3/ IEEE 802.3u/ IEEE 802.3x/ IEEE 802.3ab standard
- The packet forwarding speed of the wire-speed port is 1.488Mbps
- Network port has lightning-proof function (AC power port:differential mode +/-2kV, common mode +/-4kV)
- All ports support wire-speed switching, frame size within the range of 64 to 1536 can achieve wire-speed
- 1U Rack mounted design, easy to install and use
- Automatic adjustment, plug and play, no need software and protocol conversion



Technical Parameter


Product Name	26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports 15.4W
Product Model	OP-S24E2X
Connector Type	24x 10/100/1000M copper cable RJ45 PoE ports(All ports support MDI/MDIX automatic adjustment); 2x 10/100 /1000Mbps SFP fiber uplink ports
Forwarding Mode	1000M line speed forwarding; Packet Length: 10K; Packet Buffer: 4.1M
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meters) 100BASE-TX: Cat5 or more UTP(≤100 meters) 1000BASE-TX: Cat5 or more UTP(≤100 meters)
Performance Specifications	Backplane Bandwidth: 52Gbps Network Delay: less than 20 microsecond Packet Buffer: 96KB Address Database size: 1000 MTBF: 190,000 hours (about 21 years)
PoE Description	IEEE 802.3af, each port power is 25.5W; Port1 to Port24 support PoE power; The even number Port(1/3/5/7/9/11/13/15/17/19/21/23) is end-span(1/2+, 3/6- line pair) power supply, the odd number port(2/4/6/8/10/12/14/16/18/20/22/24) is mid-span(4/5+, 7/8- line pair) power supply
PoE Power	Port output power is 15.4W (IEEE802.3af)
Power Supply Type	End-span type(Mid-span optional)
Network Protocols	IEEE 802.3; IEEE 802.3u; IEEE 802.3ab; IEEE 802.x Flow Control
LED Indicator Status	Power, Network, PoE working status
Power	IEEE802.3af standard, each port power is 15.4W, total power is 440W
Voltage	Input: AC100~240V 50/ 60Hz
Dimension/ Weight	Dimension (LxWxH): 440 x 275 x 44.5mm; Weight:4.6kg
Working Environment	Working temperature: -20°C ~ 75°C; Storage temperature: -40° ~ 85°C; Working Humidity: 10% ~ 90%, no condensation; Storage Humidity: 5% ~ 90%, no condensation; Working Altitude: 3000 meters (10,000ft); Storage Altitude: 3000 meters (10,000ft)
Radiation	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial CE/LVD EN60950,RoHS
Warranty	1 Year Warranty, Life-time Maintenance


Product Size

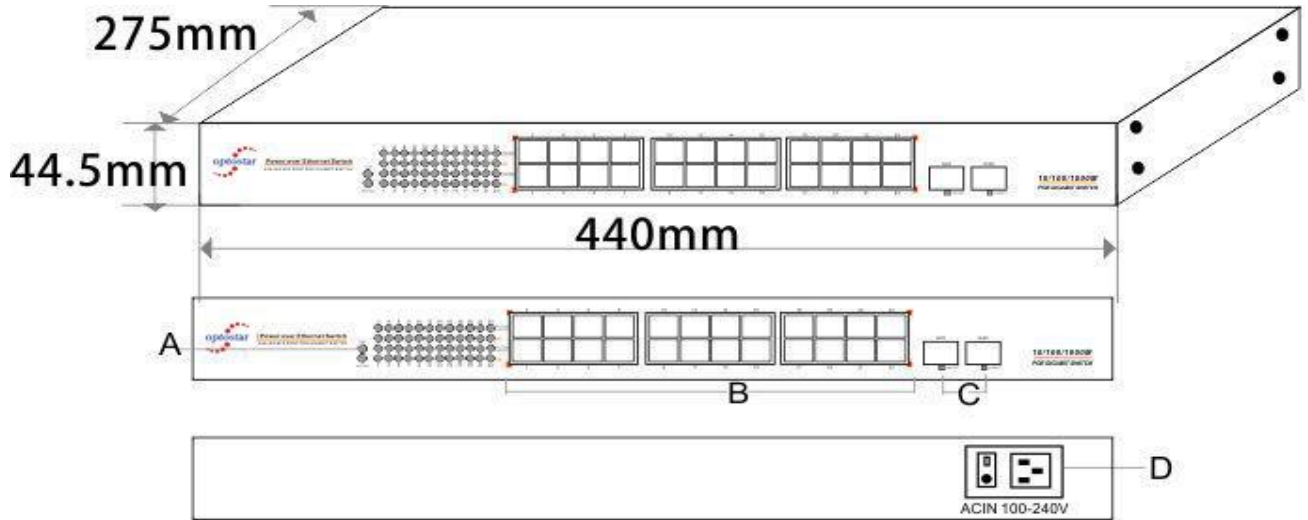

- A. Status Indicator
- B. 24x RJ45 Ports
- C. SFP Ports
- D.AC 100-240V,50/60Hz Input

Application

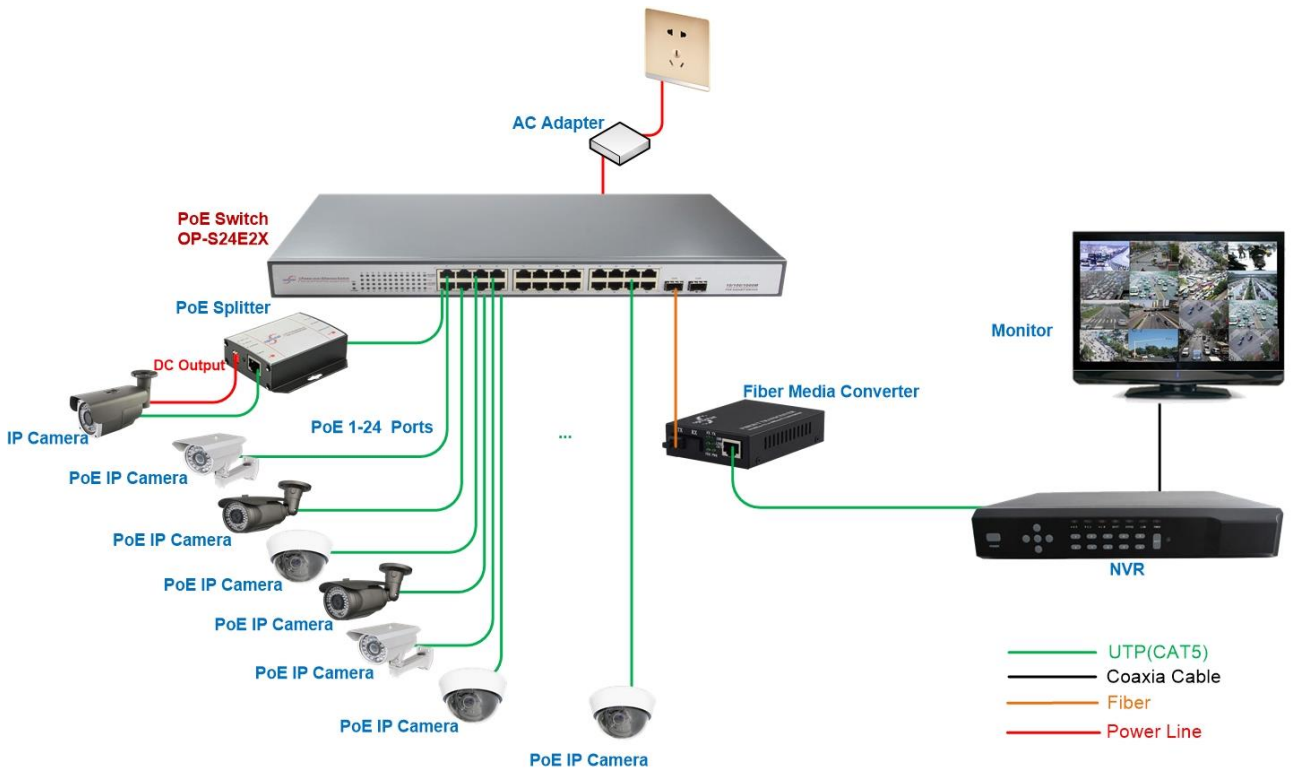



Order Information

Model	Description
OP-S24E2X	26-Port gigabit PoE switch with 24 gigabit PoE ports and 2x gigabit SFP fiber ports; port1 to port24 supports POE IEEE 802.3at international standard, each port power is 15.4W, the total power is 440W.
Notes: The even number port is end-span(1/2+, 3/6- line pair) power supply, the odd number, port is mid-span(4/5+, 7/8- line pair) power supply	

Package include

No	Package List
1	26-Port Gigabit PoE Switch with 24 Gigabit PoE Ports 15.4W (OP-S24E2X)
2	Power Adapter Cable
3	User Guide
4	Warranty Card

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.

Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address: A-14, Haide Building, the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen, China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype: ouyangroya

Web: www.optostar.com.cn