




5-Port 10/100Mbps Long Transmission PoE Switch(IEEE802.3af/at)

OP-S4A1F-L-AT

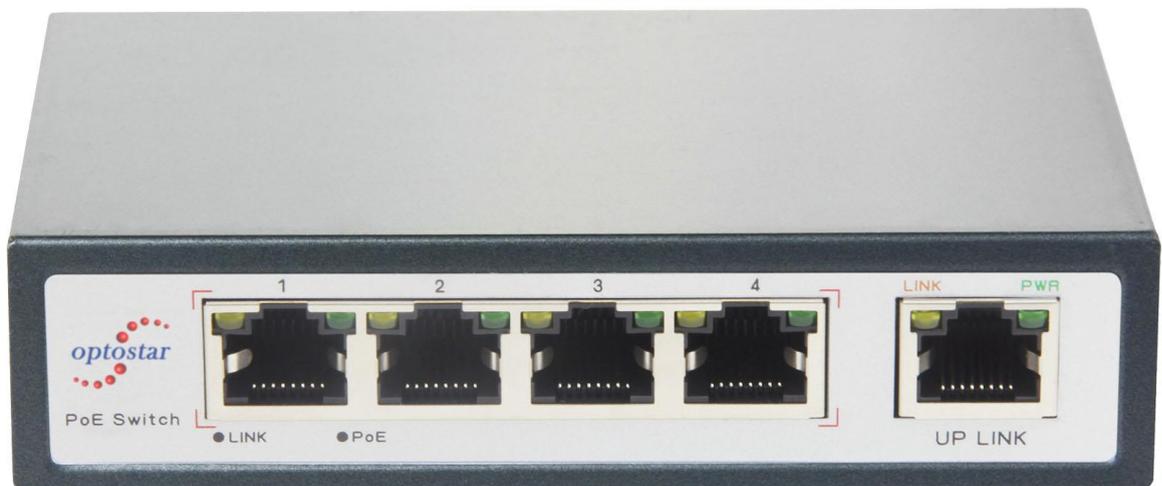

Shenzhen Optostar Optoelectronics Co., Ltd

2013. 05(Version 2)

Overview

The OP-S4A1F-L-AT switch provides power and data transmission from a network node through Cat.5e/6 cables. 5 ports could fast connect with 10/100Mbps, 4 ports among them could supply power at the standard of IEEE802.3af/at. With the auto-sensing function, it could supply power to PD device (IEEE802.3af/at standard). What's more, if the PoE device disconnected, it would stop supplying power. The switch features simple and reliable design, automatic identification of PoE supply voltage and power, speed, full duplex and AutoUplink cable type. With multi-function switch, it can be changed to long transmission distance mode, enable/disable VLAN.

This cost-effective OP-S4A1F-L-AT switch provides network layout which need to simplify wireless access point (AP) and IP-based surveillance network cameras to install in commercial network and home network. It is the ideal networking solution for work-groups and intelligent community fiber access. These devices away from electrical outlets are very suitable for hanging on the wall or ceiling. PoE eliminates the hassle for these devices, specially the electrical outlets. Connect the AC power connection to make those difficult device more flexible, and the installation cost minimization.


Product Features

- Supply power to wireless AP and IP Camera through CAT 5e/6 cable
- 5 * 10/100 Mbps auto-sensing RJ45 Ports, 1-4 port support PoE, meeting the standard of IEEE802.3af/at. Max PoE power for each port is 30W.
- Multi-function Switch: Long Transmission Distance Mode: 250 meters, Enable/Disable VLAN.
- Meeting standard of IEEE802.3 10Base-T and IEEE802.3u 100Base-TX.
- Flow Control: Full duplex based on IEEE802.3x, Half duplex based on Back Pressure
- Support port auto-flip (Auto MDI/ MDIX)
- Anti-thunder function for Uplink port (port 5), which is reaching level 2
- Total PoE Power: 110W (Port 1 - 4)
- All ports support line-speed switching (Frame size at the ranges of 64-1536)
- Mini size and no-noise design. Could be installed on desk or wall.

Technical Parameter


Product Name	10/100M 5-Port Long Transmission Distance PoE Switch
Product Model	OP-S4A1F-L-AT
Connector	4*10/100M RJ45 PoE Ports + 1*10/100M RJ45 Uplink Port
Transfer Mode	Store-and-forward, Buffer Forwarding Rate: 0.74Mpps
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meters); 100BASE-TX: Cat5/5e/6 UTP(≤100 meters);
Transmission Distance	100meters
	Under Mode E, the transmission distance could be 250 meters for 10M port.
Performance Specification	Bandwidth: 1.2Gbps (Non-blocking) Network Latency (100 to 100Mbps):maximum delay less than 20 microseconds Buffer Memory: 384K MAC Size: 2K MTBF: 100,000 hours
Switch Mode Definition	Mode S: Disable all function. Mode E: Enable the long transmission distance at 250 meters for all 10M ports (1-4 port) . Mode V: Enable VLAN for all 100M ports (1-4 port) .
Network Protocols and Standards	IEEE 802.3i 10BASET IEEE 802.3u 100BASETX IEEE 802.3x Flow Control IEEE 802.3af DTE Power via MDI IEEE 802.3at
LEDs Status	SYS: PWR EACH PORT: Connect, PoE Status
Power	Power Input: DC52V 2.15A Total power: 110W
Dimension	118 * 89 * 25mm
Working Environment	Operating Temperature: -20 ° ~ 55 ° C; Storage Temperature: -40 ° ~ 75 ° C; Humidity: 10% ~ 90%, non-condensing; Storage Humidity: 5% ~ 90%, non-condensing; Working Altitude: 3000 m (10,000 ft); Storage Altitude: 3,000 m (10,000 ft)
Radiation	FCC ClassA CE RoHs
Safety	CE Mark ,commercial CE/LVD EN60950
Warranty	1 year

Product Size

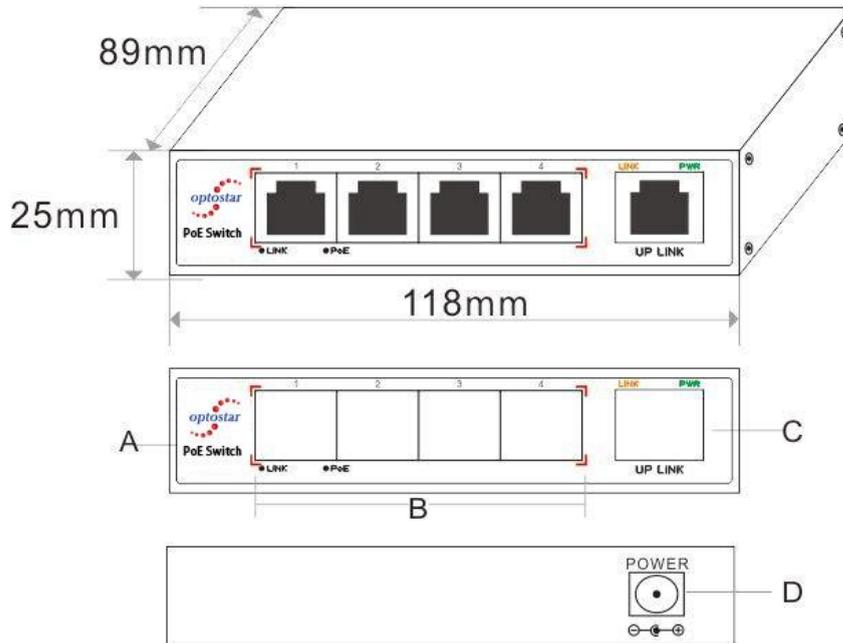

A. Multi-function Switch (S: Standard Function, E:10M/250 Meters, V:VLAN)
 B. 4 * PoE Ports C. Uplink Port D. Power Input Port

Application

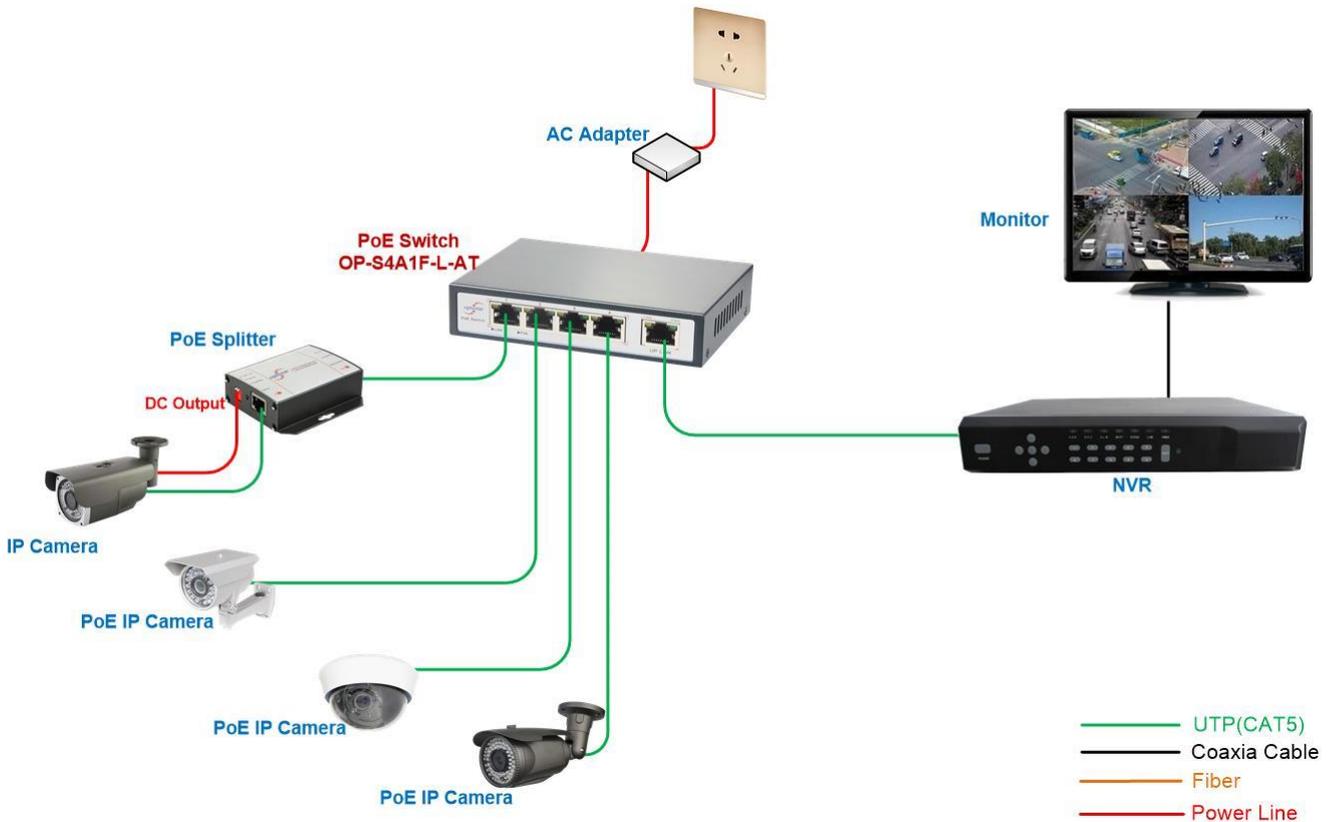



Order Information

Model	Description
OP-S4A1F-L-AT	5-Port 10/100M Long Transmission Distance PoE Switch. 4 PoE ports,10/100M. PoE standard IEEE802.3af/at. Max PoE power for each port is 30W. Total power is110W. The transmission distance is 250 meters (10M). Support VLAN function.

Package include

No	Package List
1	10/100M 5-Port Long Transmission Distance PoE Switch (OP-S4A1F-L)
2	Power Adapter
3	User Guide
4	Warranty Card

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.

Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype:ouyangroya

Web: www.optostar.com.cn