



**10/100/1000Base-T(x) to 1000Base-FX With Lightning-protection
Enhanced Industrial Fiber Media onverter**

OP-EC1x73xxx-xx-xx-EI



Shenzhen Optostar Optoelectronics Co., Ltd

2015. 11(Version 1)

Item	Enhanced Industrial Media Converter
Model No.	OP-EC1x73xxx-xx-xx-EI
Description	1*10/100/1000Base-T(X) to 1*1000Base-FX With Lightning-protection function
 	

Overview

OP-EC1x73xxx-xx-xx-EI industrial media converter is specially designed for industrial application, which provides fast and stable media conversion . It also meets the requirements of long distance, high speed, and wide broadcast.


With wide range operation temperature, alloy aluminum shell and other excellent industrial-grade design against vibration and shock, it could keep your industrial automation applications running continuously in different harsh environments.

Features

- 1*10/100/1000Base-T(X) port and 1*1000Base-SX/LX/LH/ZX fiber port
- 10/100/1000M auto-negotiation , Full/Half duplex mode, auto-MDI-MDI-X
- Excellent heat elimination without cooling fan
- Redundant dual DC power inputs
- -40℃-85℃ operating temperature range
- Super lightning protection, IP40 protection

Application

1. Network Communication
2. FTTH / FTTB / FTTx

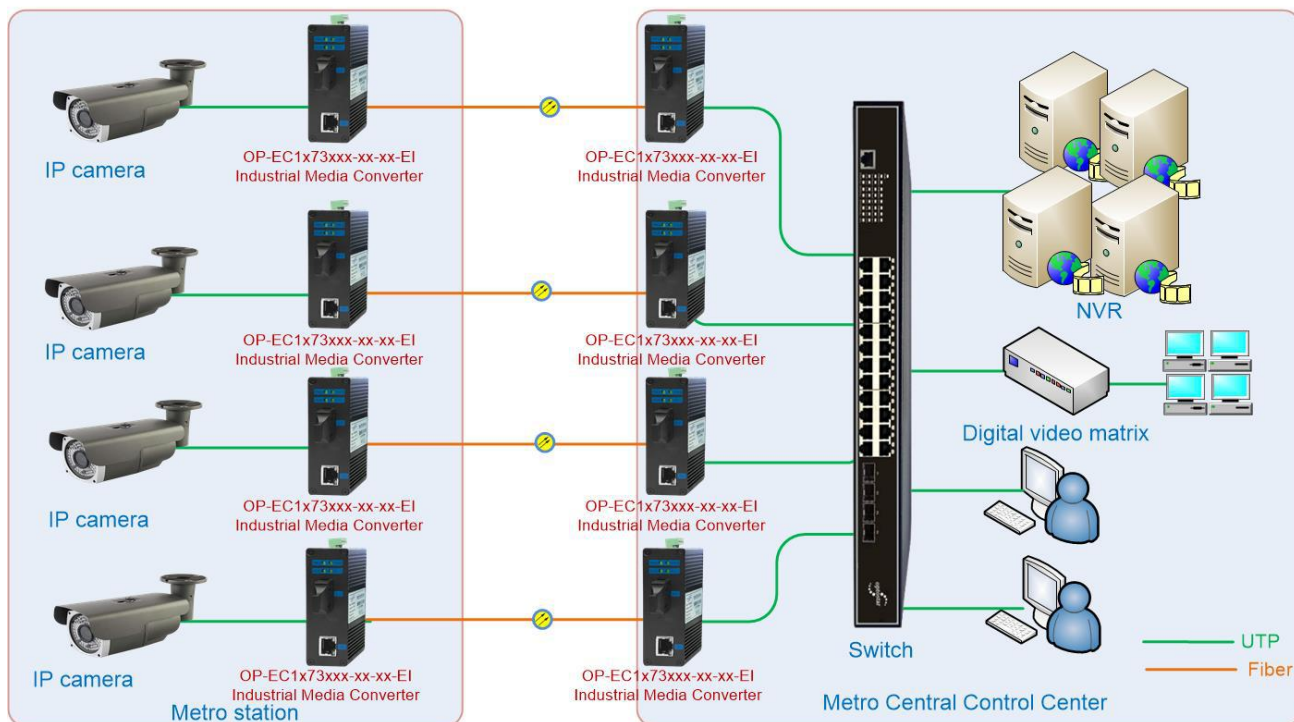

Technical Indexes

Standard	<p>IEEE802.3, IEEE802.3u, IEEE802.3ab, 10/100/1000Base-T(X), IEEE802.3z</p> <p>Safety: UL 60950-1</p> <p>Shock: IEC 60068-2-27</p> <p>Free Fall: IEC 60068-2-32</p> <p>Vibration: IEC 60068-2-6</p> <p>EMI: FCC Part 15 Subpart B Class A, EN 55022 Class A</p> <p>Industry: IEC61000-6-2</p> <p>Rail: EN50155, EN50121-4</p> <p>Traffic: NEMA TS-2</p>
EMS	<p>EN61000-4-2 (ESD), Level 3</p> <p>EN61000-4-3 (RS), Level 3</p> <p>EN61000-4-4 (EFT), Level 3</p> <p>EN61000-4-5 (Surge), Level 3</p> <p>EN61000-4-6 (CS), Level 3</p>
Copper Port	<p>1*10/100/1000Base-T(X) Port</p> <p>10/100/1000Base-T(X) auto negotiation speed</p> <p>Full/Half duplex mode</p> <p>Auto MDI-MDI-X connection</p> <p>Up to 100M Cat-5 transmission distance</p>



Fiber Port	1*1000Base-SX/LX/LH/ZX fiber port Rate: 1000Mbps Wavelength: 850nm/1310nm/1550nm Up to 550m transmission distance with multi-mode Up to 20km,40km,60km,80km transmission distance with single-mode SC/LC interfaces optional
Switch Properties	MAC Table Size: 8K Packet Buffer Size: 1M bit Processing Type: Store and Forward Exchange Properties: 148800pps (100M)
Power	Input Voltage: 24V DC(18-36VDC), Redundant dual inputs Input Current: <0.5A @24VDC Overload Current Protection: Present Reverse Polarity Protection: Present Redundant Protection: Present <i>Connection: 1 removable 6-pin terminal blocks</i>
Environmental Limits	Operating Temperature: -40℃-85℃ Storage Temperature: -40℃-85℃ Ambient Relative Humidity: 5%-95% (non-condensing)
Warranty	5 years
Physical Characteristics	Housing: Aluminum Alloy material with IP40 Protection Dimension: 98mm(L) X 78mm(W) X 32mm(H) Weight: 270g Installation: Din-Rail mounting, Wall mounting

Order Information

Model No.	Data Rate	Fiber Mode	Wavelength	Fiber Connector	Distance	Power Supply
OP-EC1M731x1-11-0.5-EI	10/100M	MMF	850nm	SC/LC	500m	Internal.DC24
OP-EC1S732x1-11-20-EI	10/100M	SMF	1310nm	SC/LC	20km	Internal.DC24
OP-EC1S733x1-11-20-EI	10/100M	SMF	1550nm	SC/LC	20km	Internal.DC24
OP-EC1S732x1-11-40-EI	10/100M	SMF	1310nm	SC/LC	40km	Internal.DC24
OP-EC1S733x1-11-40-EI	10/100M	SMF	1550nm	SC/LC	40km	Internal.DC24
OP-EC1S732x1-11-60-EI	10/100M	SMF	1310nm	SC/LC	60km	Internal.DC24
OP-EC1S733x1-11-60-EI	10/100M	SMF	1550nm	SC/LC	60km	Internal.DC24
OP-EC1S732x1-11-80-EI	10/100M	SMF	1310nm	SC/LC	80km	Internal.DC24
OP-EC1S733x1-11-80-EI	10/100M	SMF	1550nm	SC/LC	80km	Internal.DC24
OP-EC1M739x1-11-2-EI	10/100M	MM Bi-di	TX850/RX1310nm	SC/LC	500m	Internal.DC24
OP-EC1M73Ax1-11-2-EI	10/100M	MM Bi-di	TX1310/RX850nm	SC/LC	500m	Internal.DC24



OP-EC1S735x1-11-20-EI	10/100M	SMF Bi-di	TX1310/RX1550nm	SC/LC	20km	Internal.DC24
OP-EC1S737x1-11-20-I	10/100M	SMF Bi-di	TX1550/RX1310nm	SC/LC	20km	Internal.DC24
OP-EC1S735x1-11-40-I	10/100M	SMF Bi-di	TX1310/RX1550nm	SC/LC	40km	Internal.DC24
OP-EC1S737x1-11-40-I	10/100M	SMF Bi-di	TX1550/RX1310nm	SC/LC	40km	Internal.DC24
OP-EC1S735x1-11-60-I	10/100M	SMF Bi-di	TX1310/RX1550nm	SC/LC	60km	Internal.DC24
OP-EC1S737x1-11-60-I	10/100M	SMF Bi-di	TX1550/RX1310nm	SC/LC	60km	Internal.DC24
OP-EC1S735x1-11-80-I	10/100M	SMF Bi-di	TX1310/RX1550nm	SC/LC	80km	Internal.DC24
OP-EC1S737x1-11-80-I	10/100M	SMF Bi-di	TX1550/RX1310nm	SC/LC	80km	Internal.DC24

Note:

Fiber Connector is SC,x=1

Fiber Connector is ST,x=2

Fiber Connector is FC,x=3

Fiber Connector is LC,x=4

Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype:ouyangroya

Web: www.optostar.com.cn