



Framed E1-FE+2RS232 Protocol Converter

OP-PC-E1-FE+2RS232



Shenzhen Optostar Optoelectronics Co., Ltd

2013. 08 (Version 2)

Overview

Framed E1-FE+2RS232 Protocol Converter is providing one framed E1 interface, one Ethernet interface and 2 serial interfaces to achieve 10/100Base-T Ethernet data transmission on the E1 channel.

Providing one Ethernet Bridge plus 2 serial interfaces via one E1 interface;


Product Features

- Based on self -copyright IC
- Can realize monitor and control of remote equipment, OAM management data did not take up user' s timeslot and save E1 bandwidth
- E1 supports any timeslot set, the rate is 64K-2048K
- The local device can forced the remote device rate follow it
- Have indicator when the remote device is power-off or E1 line is broken or lose signal;
- Have the function of E1 interface loop back check, avoid the converter crashed because of interface loop return;
- The Ethernet interface supports jumbo frames (2036 Bytes);
- Inter-set dynamic Ethernet MAC address (4,096) with local data frame filtering function
- Ethernet interface supports 10M/100M, half/full duplex auto- Negotiation, support VLAN
- Ethernet interface supports AUTO-MDIX (crossed line and straightly connected line self-adaptable);
- Have Ethernet monitor self-reset function, the equipment will not dead
- Provide 2 clock types: E1 master clock and E1 line clock;
- Provide 2 impedances: 75 Ohm unbalance and 120 Ohm balance;
- Support SNMP Network Management
- Serial Data Interface can be RS232/RS422/RS485/TTL optional
- Serial channel can transmit adaptable serial data asynchronously 300 Kbps-19200Kbps baud rate
- Serial data multiplexing in E1 support ITU-T R.111 jumping coding mode
- The local RS232 serial data can command the remote RS232 serial data loop-back to the local. This loop-back in the outer ring of RS232 data interface, you can test the RS232 interface chip without damage
- Serial port interface lightning-protection reached IEC61000-4-5 (8/20 μ S) DM(Differential Mode): 6KV, Impedance (2 Ohm),CM(Common Mode): 6KV, Impedance (2 Ohm) standard

Technical Parameter

OP-PC-E1-FE+2RS232 Framed E1-FE+2RS232 Protocol Converter	
Ethernet interface (10/100M)	
Interface rate	10/100 Mbps, half/full duplex auto-negotiation
Interface Standard	Compatible with IEEE 802.3, IEEE 802.1Q (VLAN)
MAC Address Capability	4096
Connector	RJ45, support Auto-MDIX
E1 Interface	
Interface rate	n*64Kbps±50ppm
Interface Standard	comply with protocol G.703
Interface Code	HDB3
E1 Impedance	75 Ω (unbalance), 120 Ω (balance)
Jitter tolerance	In accord with protocol G.742 and G.823
Allowed Attenuation	0~6dBm
Dimension	
Product Size	216X140X31mm(WXDXH)
Simple packaging	274X193X84mm(WXDXH)
Piece Weight	1.2KG
Operation Environment	
Operating temperature	0°C~50°C
Storing temperature	-40°C~+70°C
Relative humidity	95 %
No causticity and solvent, dust free, and no strong magnetic interference.	
Power	
Voltage	AC180V ~ 260V; DC -48V; DC +24V
Consumption	≤10W
Warranty	2 Year Warranty, Life-time Maintenance

Application

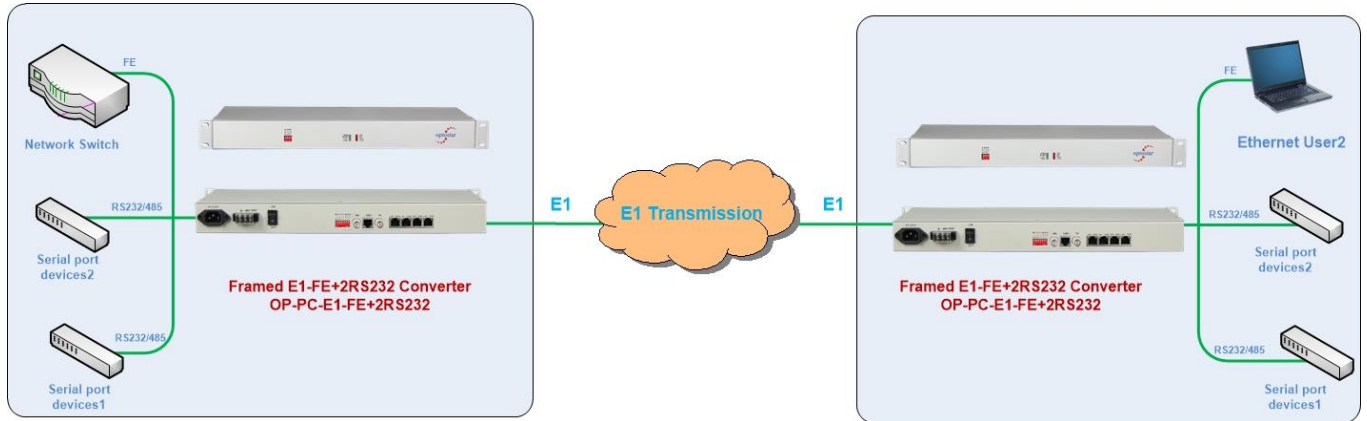

Order Information

Model	Description
OP-PC-E1-FE+2RS232	Framed E1-FE+2RS232 Protocol Converter

Package include

No	Package List
1	Framed E1-FE+2RS232 Protocol Converter
2	User Guide
3	Warranty Card

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.



Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype:ouyangroya

Web: www.optostar.com.cn