




Fixed Rack-mounted ODF(ABS Plastic)

OP-ODF-PM-D Series

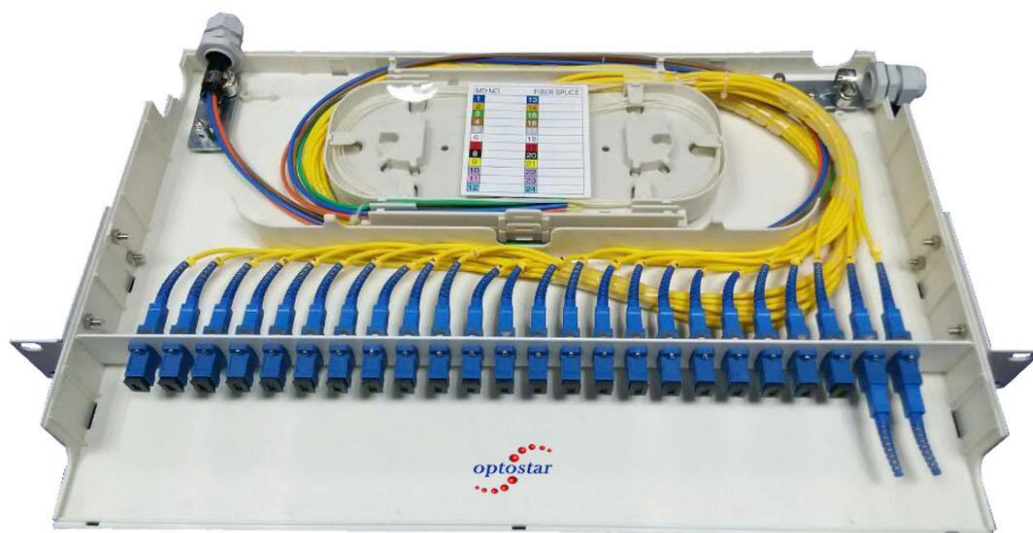

Shenzhen Optostar Optoelectronics Co., Ltd

2011. 06(Version 2)

Overview

Fiber optic plastic patch panel provides efficient cable connections between outside plant cables and equipment inside the buildings and communications facilities.

Box integrates fiber splicing, storage and cable connections together in a unit. They can manage both bundle type and ribbon type fiber cables. It is with large working space to integrate the pigtail, cables and adapters for fiber management, with standard 19 inch design, cold roll steel box, fixed type, with metal front cover, adapter plate of can be unloaded.

Product Features

- Box body-ABS plastic, white or black color.
- Splice tray-ABS plastic, 12-24cores per tray
- Optional adapter plate available: FC, SC, LC, ST...
- Suitable for 19" standard optic distribution cabinets
- With front cover; 4 fiber cable entry ports at rear side
- Cable entry ports suitable for single fiber, bundle & ribbon fiber cables
- Reasonable design ensures the cables are in good order
- Rack mounted fixed type, indoor using
- Fiber core:12 (1U) , 24 (1U) , 48 (1U)

Application

Mainly used for cable inlet and fixing; fiber splicing and protecting; pigtail storage; patch cord storage, connection and use management between wiring closets and equipments.

Applicable to Telecommunications, Fiber to the home (FTTH), LAN / WAN, CATV ect. System projects.



Technical Parameter

Operating temperature: -5~+40°C

Relative humidity: ≤85%(+30°C)

Atmospheric pressure:70~-106Kpa

Durability: >1000 times

Model Number: OP-ODF-TM-D

Quality certificate: SGS

capacity: 24cores

material: ABS Plastic

Order Information

Model	Description
OP-ODF-PM-D012	12 cores 420x300x44.5mm(1U height)
OP-ODF-PM-D024	24 cores 420x300x44.5 mm(1U height)
OP-ODF-PM-D048	48 cores 490x300x89 mm(1U height)

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.

Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype:ouyangroya



Web: www.optostar.com.cn