




Plastic Fiber Termination Box

OP-OTB-P-J

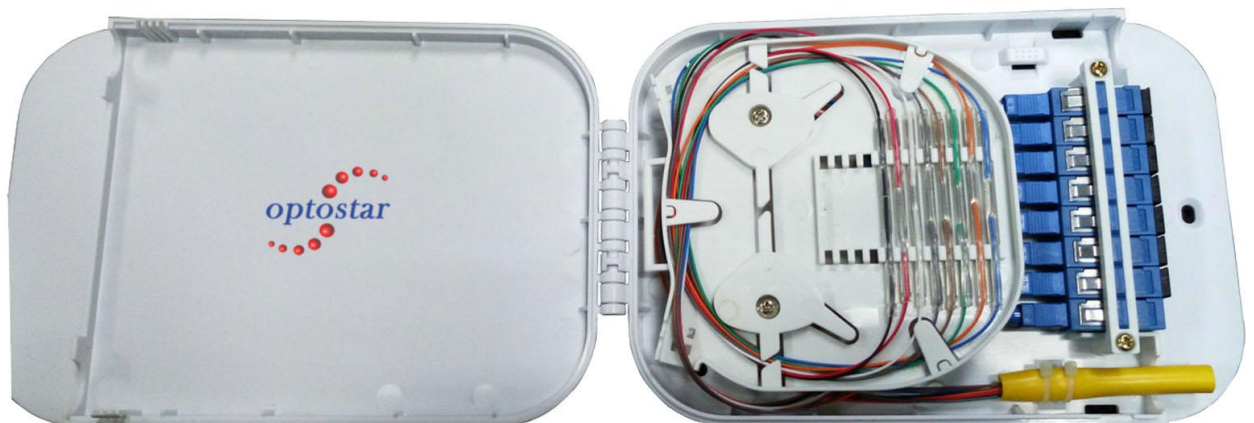

Shenzhen Optostar Optoelectronics Co., Ltd


2011. 06 (Version 2)

Overview

OP-OTB-P-J is used for FTTH, it provide protective connection for fiber optic cable and pigtail. The box is ABS material, mainly use for indoor and corridor installation.

Product Features

- 2 cable ports suitable for Max 15mm cable in and out.
- Cable no cutting and direct connection.
- Splice tray max capacity 12core, can install 8pcs SC simplex adapters.
- Snap-in type, easy to open and close, can repeatable use.

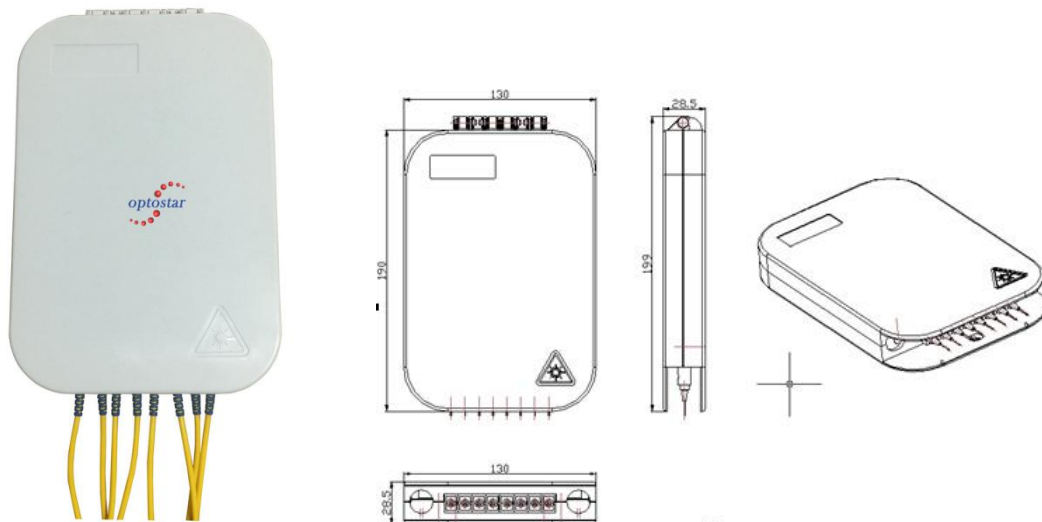

Application

Suitable for Pigtail, ribbon and bunch cable connect distribution

Used for wall-mounted, desktop ect. applications

Technical Parameter

- Operate temperature:-5°C+40°C
- Relative humidity:≤90%(+30°C)
- Atmospheric pressure: 70Kpa-106Kpa
- Storage Temperature:-40°C+70°C.
- It can be installed on the wall and table. IP20
- Carton size: 57*43*41cm
- Color: black or white optional.

Accessory bag

Name of Material	Specification	Q'ty	Remark
Heat shrinkable tube	∅ 3.0*45mm	8PCS	
Nylon cable ties	3*120mm	6PCS	
Plastic expansion tubes	φ6	3PCS	
Cross Countersunk head tapping screws	M3.5*25	3PCS	
Adapter	SC/SX	8PCS	optional


Order Information

Model	Description
OP-OTB-P-J	Plastic Fiber Termination Box

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.



Contact OPTOSTAR

Shenzhen Optostar Optoelectronics Co., Ltd

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: info@optostar.com.cn

Skype:ouyangroya

Web: www.optostar.com.cn