




## Plastic Fiber Termination Box

OP-OTB-P-L

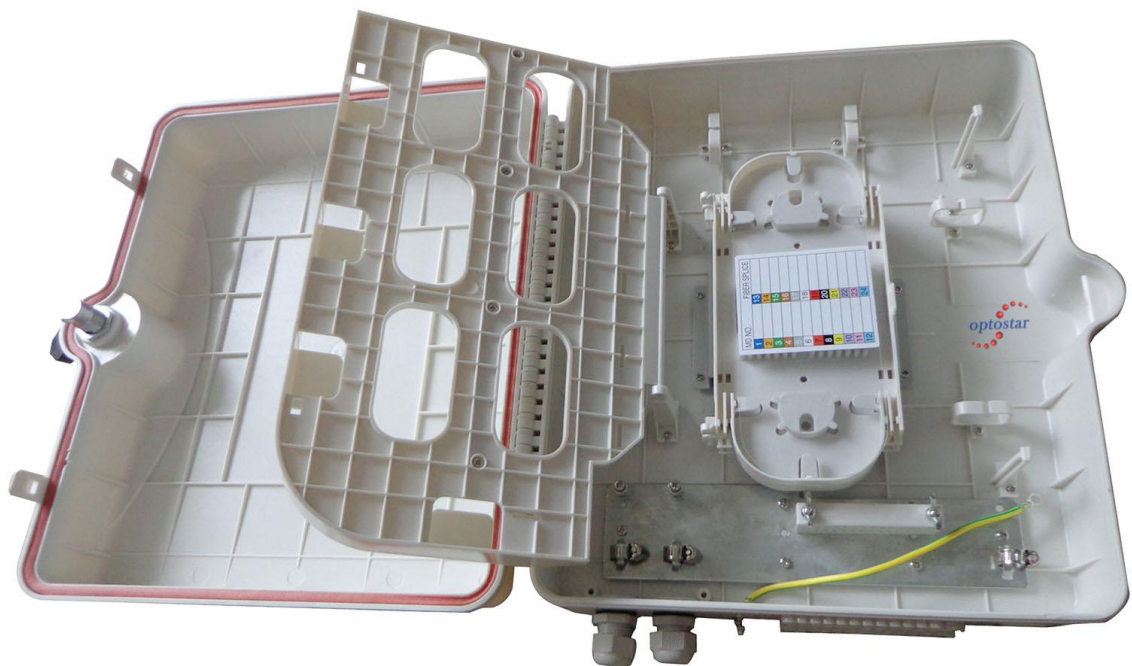

Shenzhen Optostar Optoelectronics Co., Ltd


2011. 06 (Version 2)

## Overview

Optic drop cable terminal box is widely used as a termination point for the feeder cable to connect with drop cable. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the fttx network building. Can be used indoor or outdoor.

## Product Features

- Standard size, light weight and reasonable structure
- Material: PC+ABS, wet-proof, water-proof, dust-proof, anti-aging, protection level up to IP65
- Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution...etc all in one
- Cable, pigtails, patch cords are running through own path without disturbing each other, cassette type SC/LC/PLC adaptor installation, easy maintenance.
- Distribution panel can be flipped up, feeder cable can be placed in a cup-joint way, easy for maintenance and installation.
- Cabinet can be installed by the way of wall-mounted, suitable for both indoor and outdoor uses.

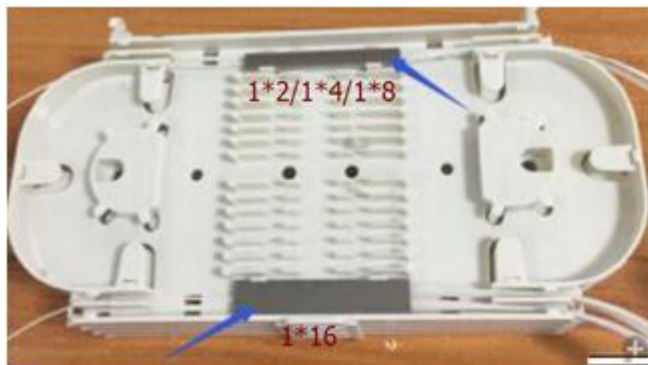

## Application

- Telecommunications subscriber loop
- Fiber to the home (FTTH)
- LAN/WAN
- CATV

### Technical Parameter

- Operate temperature:-5°C+40°C
- Relative humidity:≤90%(+30°C)
- Atmospheric pressure: 70Kpa-106Kpa
- Storage Temperature:-40°C+70°C.
- It can be installed on the wall and table. IP65
- Carton size: 420x310x138MM
- Capacity: 24/36/48 ports
- Splitter:Max 32 Core
- Pole Size:220X300MM
- Color: black or white optional.

### Order Information

Model	Description
OP-OTB-P-L	24/36/48 ports 420x310x138mm Splitter:Max 32 Core

### Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTOSTAR before they become applicable to any particular order or contract. In accordance with the OPTOSTAR policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTOSTAR or others. Further details are available from any OPTOSTAR sales representative.



## Contact OPTOSTAR

### **Shenzhen Optostar Optoelectronics Co., Ltd**

Address:A-14,Haide Building,the Intersection of Nanxin Road and Haide Second Road Nanshan District Shenzhen,China .

Tel: +86-755-26400198 +86-755-26400288 Fax: +86-755-26411001

Email: [info@optostar.com.cn](mailto:info@optostar.com.cn)

Skype:ouyangroya

Web: [www.optostar.com.cn](http://www.optostar.com.cn)