



## OP-A4000D GPON ONT



OPTOSTAR OP-A4000D GPON ONT is one of the GPON optical network unit design to meet the requirement of the broadband access network. It apply in FTTH/FTTO to provide the data, video service based on the GPON network.

GPON is the latest generations of access network technology. ITU-T G.984 is the standard protocol of GPON. The GPON standard differs from other PON standards in that it achieves higher bandwidth and higher efficiency using larger, variable-length packets. GPON offers efficient packaging of user traffic, with frame segmentation



allowing higher quality of service (QOS) for delay-sensitive voice and video communications traffic. GPON networks provides the reliability and performance expected for business services and provides an attractive way to deliver residential services. GPON enables Fiber To The Home (FTTH) deployments economically resulting to accelerated growth worldwide.

OP-A4000DD provide four GE auto-adapting Ethernet ports and one 802.11 n/b/g WiFi port. The OP-A4000DD features high-performance forwarding capabilities to ensure excellent experience with Internet and HD video services. Therefore, the OP-A4000D provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment. It has good third-party compatibility to work with the third party OLT, such as Huawei/ZTE/Fiberhome/Alcatel-Lucen.

## Features

- Full compatible with ITU-T G.984
- Support four GE auto-adapting Ethernet ports
- Support one 802.11 n/b/g Wi-Fi port
- Support OMCI for remote management
- Support Web for local management
- Support Auto-negotiation and MDI/MDIX
- Support the Ethernet interface rate, working mode and flows control
- Support loopback at UNI
- Support packet filtering and anti-illegal message attack protection
- Support performance statistics of Ethernet lines
- Support VLAN tagged label processing, traffic classification and packet filtering, STP/RSTP etc.
- Support IGMP Snooping
- Support AES-128

## Interface introduction

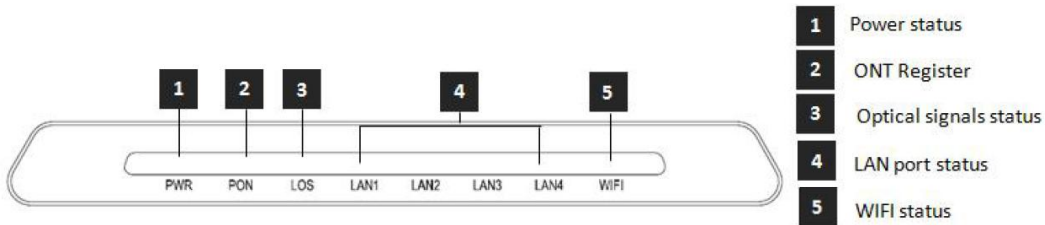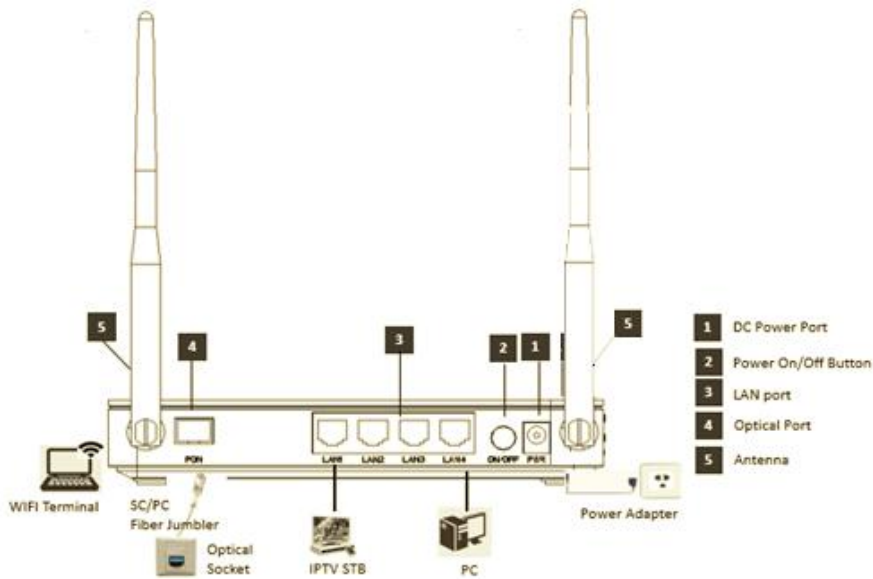

Indicator			Description
1	PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
2	PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off: In process of registering to OLT;
3	LOS	GPON optical signals	On: Optical power lower than receiver sensitivity ; Off: Optical in normal
4	LANn	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
5	WIFI	WIFI	Blinking : Data is being transmitted On : Wi-Fi function Opens

### Parameter

Item	Parameters	Specification
Interface	PON Port	1*GPON port, FSAN G.984.2 standard, Class B+ Downstream Data Rate: 2.488Gbps Upstream Data Rate: 1.244Gbps SC/PC single mode fiber 28dB Link loss and 30KM distance with 1:128
	Ethernet Port (LAN)	4*10/100/1000M Auto-negotiation RJ45 ports Full Duplex / Half-Duplex RJ45, Auto-MDI/MDI-X Transmission Distance 100 Meter

	Power Supply Port	12V DC input
Management	Network Management	Standard compliant OMCI interface as defined by ITU-T G.984.4 Support WEB management
	Management Function	Status monitor, Configuration management, Alarm management, Log management
Environmental Specifications	Shell	Plastic casing
	Power	External 12V 1A AC/DC power supply adapter Power consumption: <6W
	Dimensions	170mm(L)*130mm(W)*30mm(H) 0.3kg
	Environment	Operating Temperature: 0~50℃ Storage Temperature: -40~85℃ Operating Humidity: 10%~90%(Non-condensing) Storage Humidity: 5%~95%(Non-condensing)

## WIFI Features and Parameter

- IEEE 802.11n compliant, 2.4 GHz
- Full IEEE 802.11b/g legacy compatibility with enhanced performance
- Two-stream spatial multiplexing up to 300 Mbps PHY data rates
- Support multi-SSID (Maximum 4 SSID)
- Support automatic channel selection
- Support hide SSID
- Support wireless security of 64/128 bit WEP、802.1x、WPA and WPA2。


WIFI Parameter		
Performance parameters	Standard	IEEE802.11b/g/n
	Frequency	2.400 ~ 2.500 GHz
	Wireless data rate	IEEE 802.11b: 1,2,5.5,11Mbps IEEE 802.11g: 6,9,12,18,24,36,48,54Mbps IEEE 802.11n: up to 200 Mbps
	Modulation schemes	802.11g: 64QAM, 16QAM, QPSK, BPSK, DSSS 802.11b: CCK, DQPSK, DBPSK HT20: 64 QAM, 16QAM, QPSK, BPSK
	Channel	13*Channel, configurable to meet the standard of USA, Canada, Japan and China
	RF receive sensitivity	802.11b: -96dBm @ 1 Mbps; -93dBm @ 2 Mbps; -91dBm @ 5.5 Mbps; -88dBm @ 11 Mbps 802.11g: -90dBm @ 6 Mbps; -89dBm @ 9 Mbps;

		-89dBm @ 12 Mbps; -867dBm @ 18 Mbps; -83dBm @ 24 Mbps; -79dBm @ 36 Mbps; -75dBm @ 48 Mbps; -75dBm @ 54 Mbps 802.11n: -96dBm @ 1 Mbps;-88dBm @ 11 Mbps; -90dBm@6Mbps; -75dBm@54Mbps; -86dBm@m0/20MHz;-69dBm@m15/20MHz;
	RF TxPower	•TX power out B mode @ 11 Mbps: 18dBm +/- 2 • TX power out G mode @ 54 Mbps: 16dBm +/- 2 • TX power 11n mode @ HT20: 16 dBm +/-2
	Encryption Mode	64-bit, 128-bit WEP, AES, TKIP, WPA, WPA2, 802.1x
	Transmission distance	100m indoors coverage area 300m outdoors coverage area (varying depending on the actual environment)

### Application

- ✧ Solution: FTTH、FTTO、PON+EOC
- ✧ Business: Broadband Internet、IPTV、IP Camera

### Network Construction

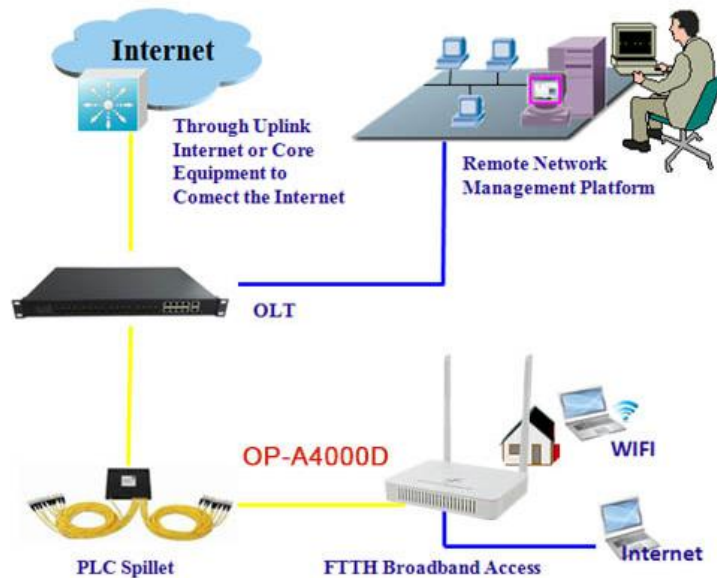

**Figure: OP-A4000D Application Diagram**

### Ordering Information

Product Name	Product Model	Descriptions
--------------	---------------	--------------

GPON ONU with Wi-Fi	OP-A4000D	4X10/100M Ethernet interface, 1 GPON interface, support Wi-Fi function, ABS casing, external power supply adapter
---------------------	-----------	---